



## MODEL WS SLANT WALL HOUSING

- Constructed of heavy gauge galvanized steel or aluminum.
- For Model DC, DCA, FQ and FN Fans.
- Energy Savings - with inside shutter saves up to 3750 BTU/HR heat loss per fan.
- High Flow Capacity - shutter directs air to fan. Select fan at .05" sp. instead of .10".
- Weather Protected - slant arrangement protects motor and drives from elements.
- Outside Mounting - keeps equipment from blocking aisles.
- Assembled to fan for quick, easy field installation.
- Includes 1" x 1/2" guard on outlet side.

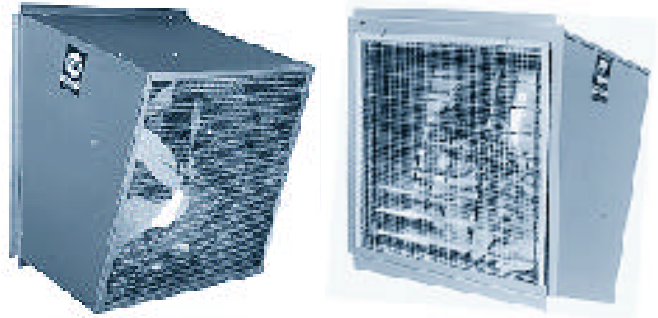

- Shutter and inlet guard held in place with quick release clips.
- Wiring knockout included to allow all wiring connections for motor to be made inside the building. For fan application, see pages 4 and 5 for Windmaster® (DC or DCA) and page 8 for DynaMaster® (FQ and FN).

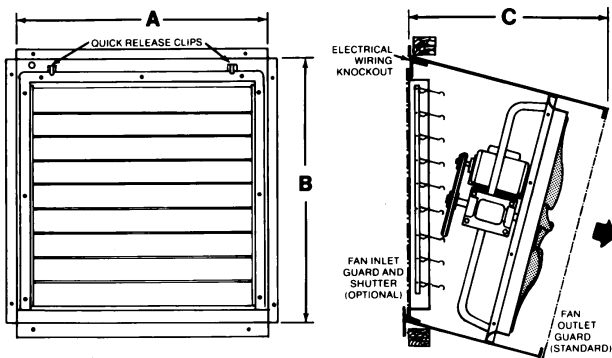

FAN SIZE	WALL HOUSING		AUTOMATIC ALUMINUM SHUTTER		INLET GUARD		INSIDE FRAMED OPENING DIMENSIONS		
	MODEL	WT.	MODEL	WT.	MODEL	WT.	A	B	C
12"	WS12FQ	20	WAA1515	4	GS12	4	16 <sup>3</sup> / <sub>4</sub> "	18"	24"
16"	WS16FQ	23	WAA2020	8	GS16	4	21 <sup>3</sup> / <sub>4</sub> "	23 <sup>1</sup> / <sub>4</sub> "	27"
18"	WS18FN	28	WAA2222	8	GS18	5	23 <sup>3</sup> / <sub>4</sub> "	25 <sup>1</sup> / <sub>4</sub> "	24"
24"	WS24DC	35	WAA2727	9	GS24	5	28 <sup>3</sup> / <sub>4</sub> "	30 <sup>3</sup> / <sub>4</sub> "	31 <sup>7</sup> / <sub>8</sub> "
30"	WS30DC	42	WAA3333	13	GS30	7	34 <sup>3</sup> / <sub>4</sub> "	36 <sup>1</sup> / <sub>2</sub> "	34 <sup>1</sup> / <sub>4</sub> "
36"	WS36DC	46	WAA3939	17	GS36	10	40 <sup>3</sup> / <sub>4</sub> "	42 <sup>1</sup> / <sub>4</sub> "	34 <sup>1</sup> / <sub>8</sub> "
42"	WS42DC	53	WAA4545	25	GS42	12	46 <sup>3</sup> / <sub>4</sub> "	49"	36 <sup>3</sup> / <sub>4</sub> "
48"	WS48DC	78	WAA5454	35	GS48	15	54 <sup>3</sup> / <sub>4</sub> "	57 <sup>1</sup> / <sub>4</sub> "	40 <sup>7</sup> / <sub>8</sub> "
54"	WS54DC	106	WAA6060	40	GS54	18	60 <sup>3</sup> / <sub>4</sub> "	63 <sup>1</sup> / <sub>2</sub> "	39 <sup>1</sup> / <sub>2</sub> "



**CAUTION!** Guards must be installed when fan is within reach of personnel or within seven (7) feet of working level or when deemed advisable for safety.

## MODEL WB SQUARE WALL HOUSING

- Constructed of heavy gauge galvanized steel.
- For Model DC and DCA.
- Provides convenient means to install fan and shutter.
- Outside Mounting - keeps equipment from blocking aisles.
- Mounting Flanges for attaching to wall and to attach shutter.
- Assembled to fan for quick, easy field installation.

FAN SIZE	WALL HOUSING		AUTOMATIC ALUMINUM SHUTTER		INLET GUARD		INSIDE FRAMED OPENING DIMENSIONS		
	MODEL	WT.	MODEL	WT.	MODEL	WT.	A	B	C
24"	WB24DC	30	WAA2727	9	GD24	5	28 <sup>3</sup> / <sub>4</sub> "	28 <sup>3</sup> / <sub>4</sub> "	24"
30"	WB30DC	36	WAA3333	13	GD30	7	34 <sup>3</sup> / <sub>4</sub> "	34 <sup>3</sup> / <sub>4</sub> "	24"
36"	WB36DC	38	WAA3939	17	GD36	10	40 <sup>3</sup> / <sub>4</sub> "	40 <sup>3</sup> / <sub>4</sub> "	24"
42"	WB42DC	40	WAA4545	25	GD42	12	46 <sup>3</sup> / <sub>4</sub> "	46 <sup>3</sup> / <sub>4</sub> "	24"
48"	WB48DC	70	WAA5454	35	GD48	15	54 <sup>3</sup> / <sub>4</sub> "	54 <sup>3</sup> / <sub>4</sub> "	25"
54"	WB54DC	96	WAA6060	40	GD54	18	60 <sup>3</sup> / <sub>4</sub> "	60 <sup>3</sup> / <sub>4</sub> "	29"

**CAUTION!** Guards must be installed when fan is within reach of personnel or within seven (7) feet of working level or when deemed advisable for safety.

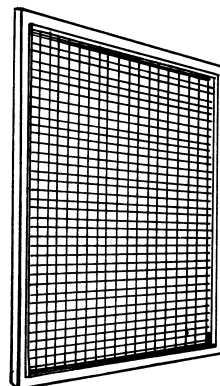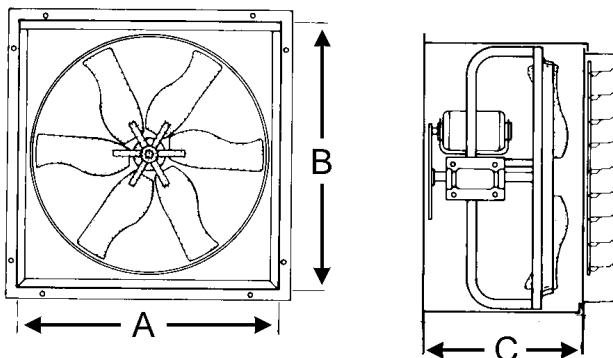

All Guards: for wall housings have 1" x " welding galvanized wire in aluminum frame for inlet side of wall housing. Outlet guards are included on WS wall housings as standard equipment.

Inlet guards are mounted with quick release clips.